

JBoss ESB 4.7

SOA Software Integration

JBESB-GS-11/6/09



Legal Notices

The information contained in this documentation is subject to change without notice.

JBoss Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. JBoss Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

Java™ and J2EE is a U.S. trademark of Sun Microsystems, Inc. Microsoft® and Windows NT® are registered trademarks of Microsoft Corporation. Oracle® is a registered U.S. trademark and Oracle9™, Oracle9 Server™ Oracle9 Enterprise Edition™ are trademarks of Oracle Corporation. Unix is used here as a generic term covering all versions of the UNIX® operating system. UNIX is a registered trademark in the United States and other countries, licensed exclusively through X/Open Company Limited.

Copyright

JBoss, Home of Professional Open Source Copyright 2006, JBoss Inc., and individual contributors as indicated by the @authors tag. All rights reserved.

See the copyright.txt in the distribution for a full listing of individual contributors. This copyrighted material is made available to anyone wishing to use, modify, copy, or redistribute it subject to the terms and conditions of the GNU General Public License, v. 2.0. This program is distributed in the hope that it will be useful, but WITHOUT A WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.

See the GNU General Public License for more details. You should have received a copy of the GNU General Public License, v. 2.0 along with this distribution; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.

Software Version

JBoss ESB 4.7

Restricted Rights Legend

Use, duplication, or disclosure is subject to restrictions as set forth in contract subdivision (c)(1)(ii) of the Rights in Technical Data and Computer Software clause 52.227-FAR14.

© Copyright 2009 JBoss Inc.

Configuration

In order to communicate with the SOA Software registry, you will have to configure JBoss ESB to communicate with the SOA Software registry. In order to do this, the first thing you need to do is to point the JBoss ESB towards the SOA Software registry.

This text assumes you have a running JBoss Application/ESB Server, version 4.6.GA.

jbossesb-properties.xml

Edit `server/<profile>/deploy/jbossesb.sar/jbossesb-properties.xml` and change the following lines – if you are deploying to JBoss AS 5.1.0 or higher, this file is located in `server/<profile>/deployers/esb.deployer/jbossesb-properties.xml` :

```
<property name="org.jboss.soa.esb.registry.queryManagerURI" value="org.apache.juddi.registry.local.InquiryService#inquire"/>
<property name="org.jboss.soa.esb.registry.lifeCycleManagerURI" value="org.apache.juddi.registry.local.PublishService#publish"/>
```

To the following (and make sure to edit the `queryManagerURI` and the `lifeCycleManagerURI` to match the URLs from your installation of SOA Workbench) :

```
<property name="org.jboss.soa.esb.registry.uddi.maxRows" value="100"/>
<property name="org.jboss.soa.esb.registry.queryManagerURI" value="http://stacks2:9901/uddi/inquiry_v2"/>
<property name="org.jboss.soa.esb.registry.lifeCycleManagerURI" value="http://stacks2:9901/uddi/publish_v2"/>
```

Change `jbossesb-properties.xml`:

```
<property name="org.jboss.soa.esb.scout.proxy.transportClass" value="org.apache.ws.scout.transport.LocalTransport"/>
```

To

```
<property name="org.jboss.soa.esb.scout.proxy.transportClass" value="org.apache.ws.scout.transport.AxisTransport"/>
```

Also, within `jbossesb-properties.xml`, change :

```
<property name="org.jboss.soa.esb.registry.user" value="administrator"/>
<property name="org.jboss.soa.esb.registry.password" value="password"/>
```

to match the SOA Workbench user and password you'll be using.

Add Axis and commons-discovery JARs

Copy a recent version of Apache Axis and Apache Commons Discovery into `server/<profile>/lib`. The integration was tested using `axis-1.4.jar` and `commons-discovery-0.2.jar`. Download `axis-bin-1_4.tar.gz` from the Apache Axis site (<http://ws.apache.org/axis/>) to find these JARs.

SOA Workbench Configurations


Configure the guest user in Workbench to the guest role. Click on the top level registry node in Workbench (in the Organization Tree) and click on the second-level “Security” tab (within the Workbench hierarchy). Click “Manage Role” for “Guest” under “Role Memberships” :

The screenshot shows the SOA Software Service Manager interface in Mozilla Firefox. The browser address bar shows the URL: `http://stacks2.lab.bos.redhat.com:9900/pm/index.do?redirectpage=up`. The user is logged in as `Local Domain/administrator`. The interface has a navigation bar with tabs: DASHBOARD, WORKBENCH, POLICIES, ALERTS, SECURITY, MONITORING, and CONFIGURE. The WORKBENCH tab is active, and the SECURITY sub-tab is selected. On the left, the Organization Tree shows the Registry node selected. The main content area displays the Role Memberships for the Guest user. The table below lists the roles and their descriptions, with a 'Manage Role' link for each.

Name	Description	Action
Developer	Responsible for registering and building web services.	Manage Role
Guest	Responsible for allowing runtime anonymous access.	Manage Role
Infrastructure Manager	Responsible for installing Management Points, virtualizing services, and deploying services to Management Points.	Manage Role
Operation Manager	Responsible for developing security and monitoring policies and assigning them to services and organizations.	Manage Role
Organization Administrator	Responsible for adding, modifying and deleting organizations, managing services, policies, and Management Points within an organization.	Manage Role
Policy Administrator	Responsible for adding, modifying and deleting policies within an organization. This role applies at the root organization only.	Manage Role
Provision Manager	Responsible for approving contracts.	Manage Role
Security Administrator	Responsible for granting Users and User Groups access to Workbench within an organization.	Manage Role
System Administrator	Reserved role responsible for configuring all aspects of Service Manager, it can act on behalf of any other role	Manage Role
System Agent	Reserved role for policy enforcement, usually assigned to the container identities.	Manage Role
System User	Reserved role for read-only access to Service Manager configuration.	Manage Role

At the bottom of the page, there is a JavaScript console output: `javascript:manageUserWithRolesPrivileges('Guest')`.

Search for the user “guest”, and add them to the Guest Role by selecting the checkbox next to “guest” clicking “Apply” :

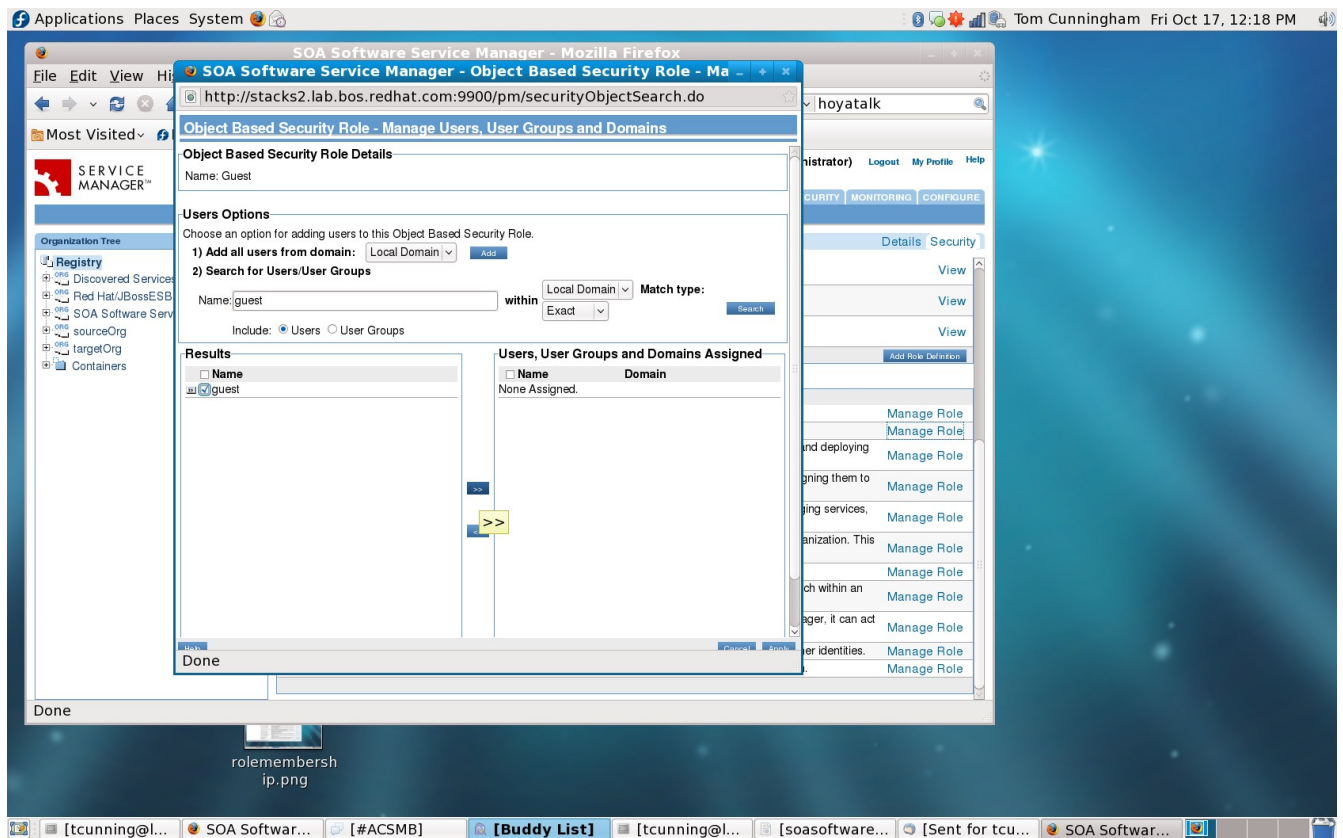

Workflow Configurations

Change the Workflow so that ESB services are published upon creation. Click on the “Configure” tab and then select “Workflow”. View the Workflow Definition, save it to your local disk, and then change the function type line under @create to `<function type="publish" />` and the step attribute to “100”. After saving, Update the Workflow to the local copy you have saved.

Before:

```
<action id="1" name="@create">
  <results>
    <unconditional-result old-status="Created" status="Draft" step="100" owner="{caller}"/>
  </results>
  <post-functions>
    <function type="setLifecycleStage">
      <arg name="stage">Design</arg>
    </function>
  </post-functions>
</action>
```

After:

```
<action id="1" name="@create">
  <results>
    <unconditional-result old-status="Created" status="Draft" step="100" owner="{caller}"/>
  </results>
  <post-functions>
    <function type="publish" />
  </post-functions>
</action>
```

Running


Start JBossESB :

```
cd bin
run.bat (if on Windows) or run.sh (on Unix)
```

Read [product/docs/GettingStarted.pdf](#) and follow the directions for running the Helloworld QS.

Managing Your Services

You can manage your services through Workbench – as you notice in the left frame of the screenshot below, services register with the SOA Software Workbench.

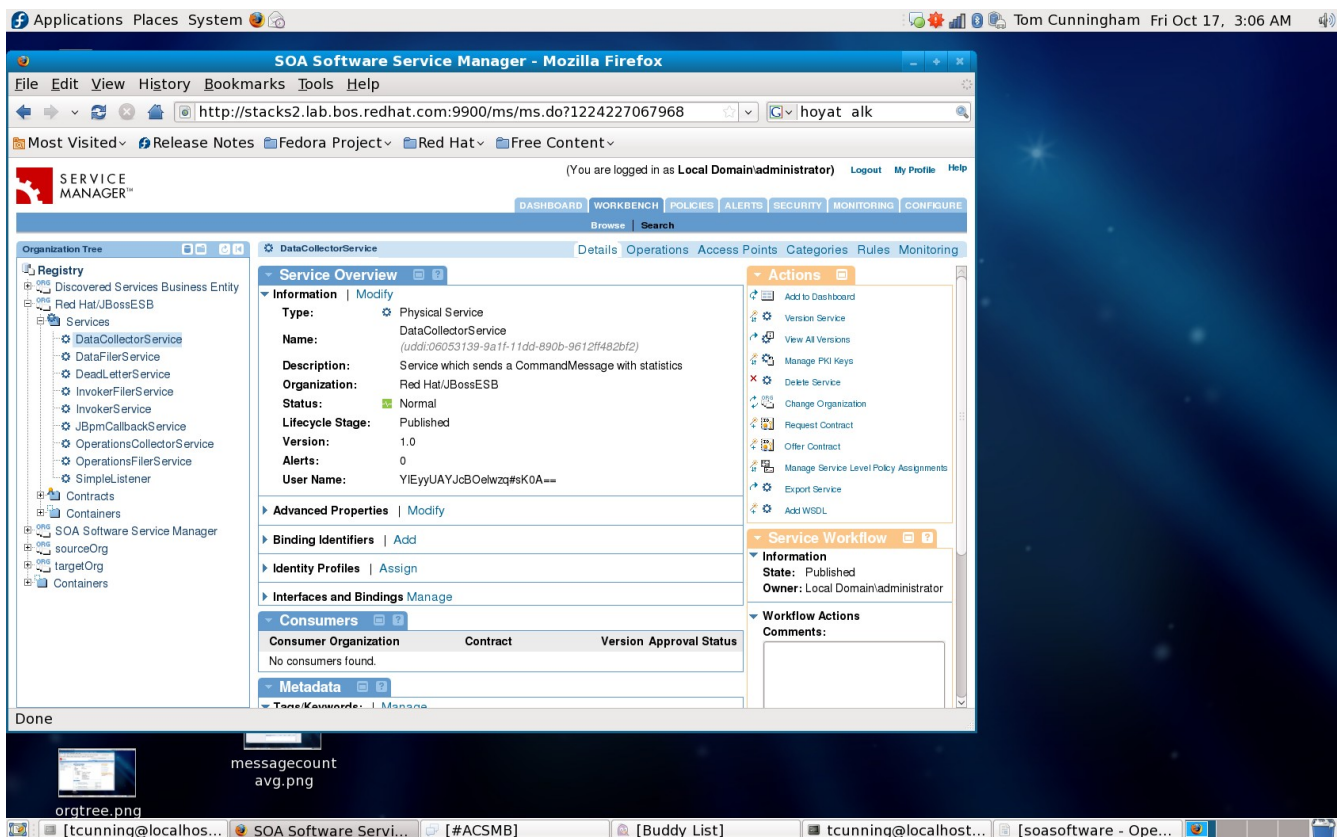

Search:

The “Search” option within Workbench allows the user to manage their services and shows the state, version, description, and number of alerts produced from those services.

The screenshot displays the SOA Software Service Manager interface within a Mozilla Firefox browser window. The browser's address bar shows the URL `http://stacks2.lab.bos.redhat.com:9900/ms/ms.do?1224227067968`. The user is logged in as `Local Domain/administrator`. The interface includes a navigation bar with tabs for `DASHBOARD`, `WORKBENCH`, `POLICIES`, `ALERTS`, `SECURITY`, `MONITORING`, and `CONFIGURE`. The `WORKBENCH` tab is active, and the `Search` option is selected. Below the navigation bar, there is a search criteria section with a dropdown menu for `Load Saved Search` and buttons for `Search` and `Clear`. The search results are displayed in a table with the following columns: `Status`, `Name`, `Version`, `Stage`, `Description`, `Alerts`, and `Actions`. The table lists several services, including `Alert Manager`, `Authorization Decision Service`, `Container Service`, `Container State Service`, `DataCollectorService`, `DataFileService`, `DeadLetterService`, `InvokerFileService`, `InvokerService`, `JBpmCallbackService`, and `Management Console`. Each service row includes a status icon, a name, version, stage, description, alert count, and a dropdown menu for actions.

Status	Name	Version	Stage	Description	Alerts	Actions
	Alert Manager	-	-	Alert Manager Subsystem Service	0	- select action -
	Authorization Decision Service	-	-	Authorization Decision Service	0	- select action -
	Container Service	-	-	Container Service	0	- select action -
	Container State Service	-	-	Container State Service	0	- select action -
	DataCollectorService	1.0	Published	Service which sends a CommandMessage with statistics	0	- select action -
	DataFileService	1.0	Published	Service that files data into the database	0	- select action -
	DeadLetterService	1.0	Published	Dead Messages can be send to this service, which is configured to store and/or notify	0	- select action -
	InvokerFileService	1.0	Published	Service that files data into the database	0	- select action -
	InvokerService	1.0	Published	Service which sends a CommandMessage with operations result	0	- select action -
	JBpmCallbackService	1.0	Published	Service which makes Callbacks into jBPM	0	- select action -
	Management Console	-	-	Management Console Subsystem Service	0	- select action -